

Visiline 1 Sliding Door (PS6)

System for sliding window and doors with straight aesthetic, which counts with a central minimalistic interlock of just 35 mm of visible section.

It allows maximising the glazing capacity up to 34 mm increasing the acoustic and thermal performance.

Its sashes of up to 240 kg weight allow a maximum dimensions of 2200 (W) x 2600 (H) mm.

Visi|line



Visiline 1 Sliding Door (PS6)

Visi|line

Transmittance

Uw from 1,2 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 34 mm

Maximum acoustic insulation **Rw = 40 dBA**

Categories achieved at test centre

Air permeability
(EN 12207): Class 4

Water tightness
(EN 12208): Class 7A

Wind resistance
(EN 12210): Class C5
Reference test 1,80 x 2,20 m, 2 sashes

Finishes



Possibility of dual colour
Colour powder coating (RAL, mottled and rough)
Anodized



Sections Profile thickness

Frame 70 mm
126 mm 3 rails
Sash 48 mm

Polyamide strip length 34 mm

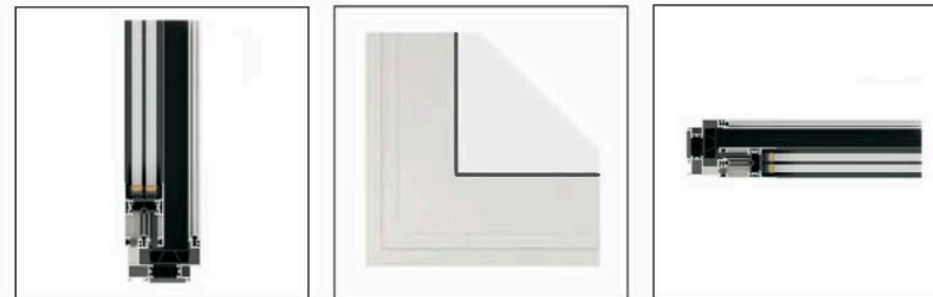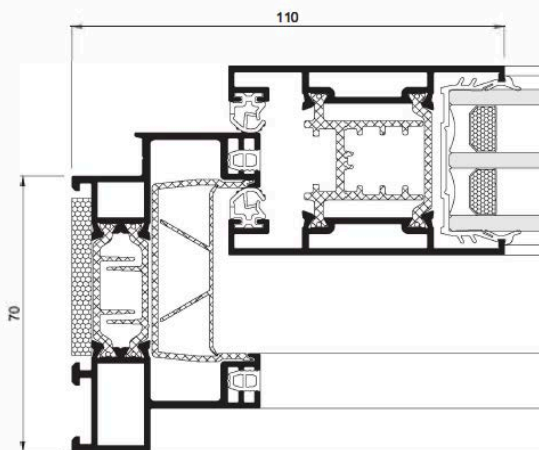

Opening possibilities



Sliding of 2, 3, 4 & 6 sashes
Possibility of 3 rails

Maximum dimensions/sash

Lift version
Width (L) = 2200 mm
Height (H) = 2600 mm

Consult maximum weight and dimensions according to typologies

Maximum weight/sash

240 Kg